

# Merchandisers

Slide Door • FMD-35-SD • FMD-47-SD • FMD-69-SD



Item # \_\_\_\_\_

## Standard Features

- Glass Door Merchandisers are designed with quality and durability that you will not find in any other products in its class.
- **No-chip exterior**, durable and stylish black vinyl finish - Std. (Also available in white).
- Easy to clean NSF approved white coated steel interior, Stainless Steel floor.
- Electronic controller for a proper temperature thru out your box.
- "Low-E" consumption **LED interior lighting** provides greater visibility, shadow-free illumination and enhanced product display.
- Factory balanced and environmentally friendly refrigeration system, R-134A and R-404A for 3 door refrigerator.
- High density, CFC-Free polyurethane insulation.
- Double pane thermal insulated glass door with extruded aluminum frames for the best efficiency and durability.
- Adjustable epoxy coated wire shelves (four per door - standard).
- Bottom mount compressor system with service friendly rail system.
- Illuminated exterior sign panel.
- NSF-7 listed for storage and/or display of packaged or bottle products.



FMD-35-SD



FMD-47-SD



FMD-69-SD

### Options & Accessories

- Epoxy coated shelves
- 220 volts / 50 cycles / 1 phase
- Bottle rail shelves
- Customized display panel



\* Conforms to UL & NSF-7 standards

Model	Door	Capacity (Cu.Ft)	Shelves	Amps	HP	Voltage	Nema Plug	Cord Length	Cabinet Dimensions			Shipping	
									L	D	H	(Wt. / Cubes)	
<b>Sliding Door Refrigerators</b>													
FMD-35-SD	2	35	4	6.9	1/3	115	5-15P	8'	43 1/2" (914 mm)	32" (812 mm)	78 5/8" (1,998 mm)	347 (157 kg)	71 (1.99 m <sup>3</sup> )
FMD-47-SD	2	47	4	6.9	1/3	115	5-15P	8'	54" (1,103mm)	32" (812 mm)	78 5/8" (1,998 mm)	393 (178 kg)	89 (2.49 m <sup>3</sup> )
FMD-69-SD	3	69	12	10.3	1/3	1156	5-15P	8'	83" (2,108 mm)	33 1/2" (850 mm)	78 5/8" (1,998 mm)	690 (312 kg)	140 (3.96 m <sup>3</sup> )

\*All specifications are subject to change without notice.

## Specifications Merchandisers

### Construction

Exterior made of durable and stylish black vinyl, non-chip or peel. White coated steel interior, NSF approved with high quality stainless steel floor. High density and environmentally friendly CFC-Free polyurethane insulation, promotes Zero Ozone Depletion Potential (ODP) and Zero Global Warming Potential (GWP).

Entire cabinet is foamed in place to prevent condensation and optimize efficiency. Double pane thermal insulated glass door with extruded aluminum frames for the best efficiency. Self-closing doors with magnetic gaskets and positive seal closure system.

"Low-E" consumption LED interior lighting for greater visibility, shadow-free illumination and enhanced product display. All units have full height

LED lighting along the door frame including a safety shield per section outside the food zone. Illuminated exterior sign panel with different options.

### Refrigeration System

Factory oversized and balanced refrigeration system, using environmentally friendly, CFC Free refrigerant: R-134A and R-404A for 3 door refrigerator. Bottom mounted condensing unit on a rail system for easy access. Evaporator coil is mounted to interior top panel encased in stainless steel. Large fan motor and fan blades for better air flow. Refrigerators are designed to maintain temperatures between 33° F to 38°F.

Electronic controller with large digits for better temperature display. Automatic defrost.

### Shelving


Four epoxy white coated wire shelving standard per door with channel slides for supports. Adjustable in 1/2" increments per shelf. Aluminum pilasters and stainless steel clips.

### Others

Unit is supplied standard with a 8' cord and plug (Nema 5-15p).

### Warranty

Three year parts and labor warranty. Five year compressor warranty (Continental U.S.A. & Canada only).

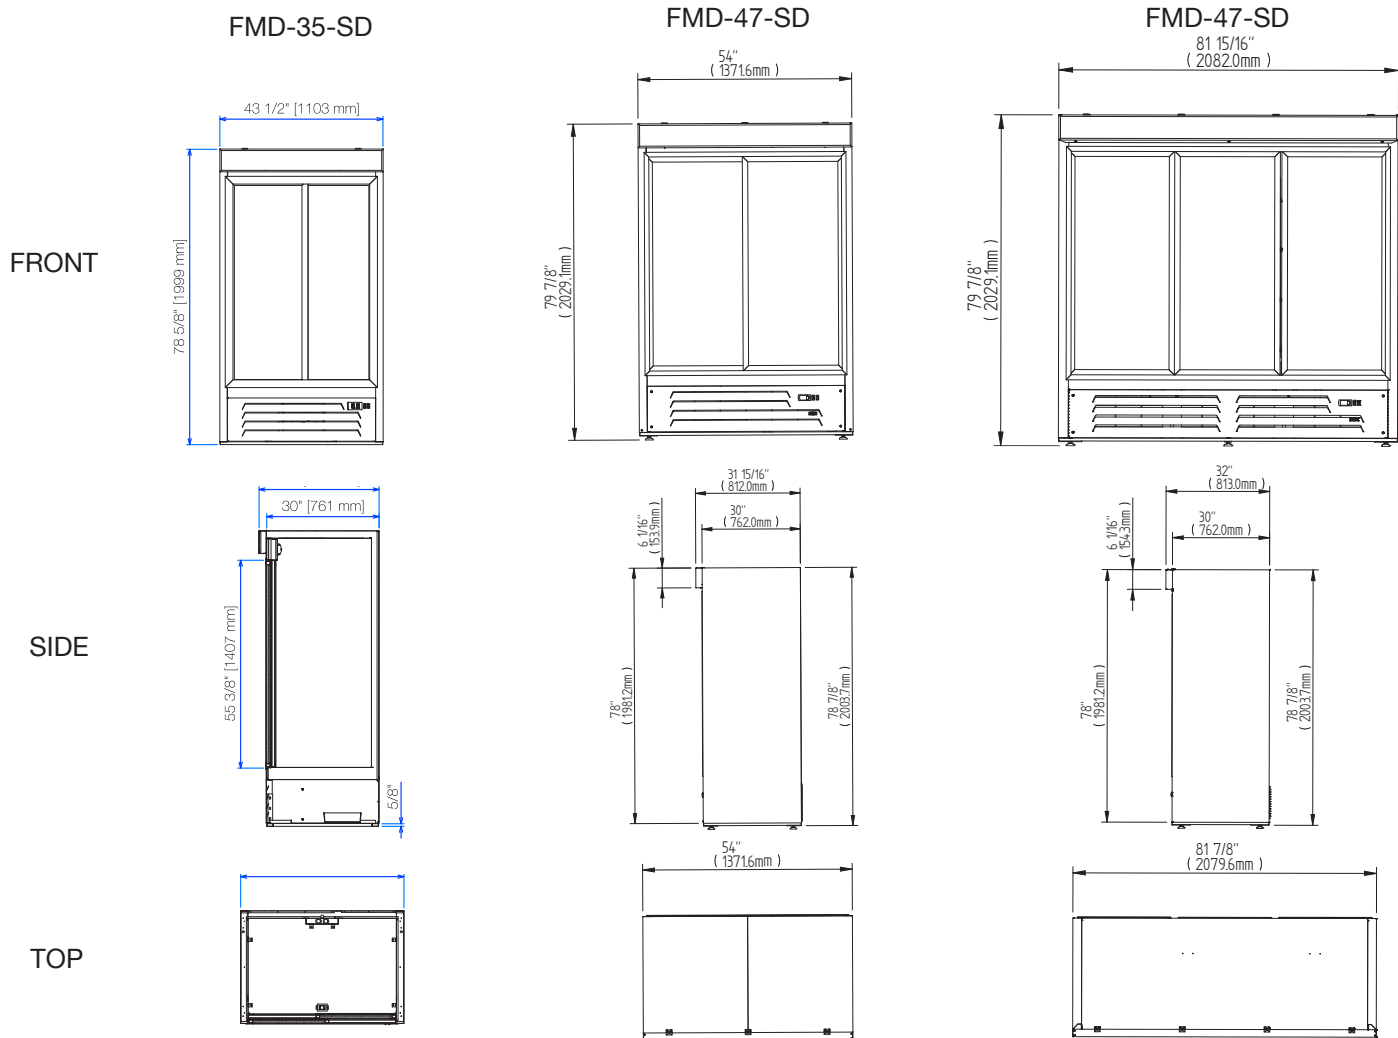

The manufacturer reserves the rights to modify materials and specifications without notice. Printed in the USA • 11/2012

